




METAL FORMS CORPORATION  
SINCE 1909

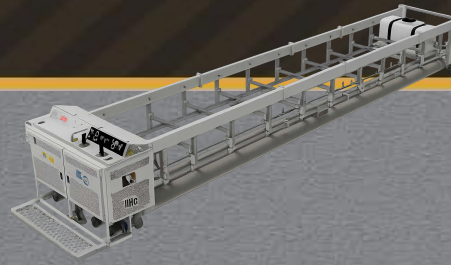

## FEATURES & ADVANTAGES

Feature	Advantage	Competition
<p><b>Power Unit /Controls</b></p> <ul style="list-style-type: none"> <li>• Simple operator interface</li> <li>• Ergonomic layout</li> <li>• Streamlined, electronically controlled hydraulics</li> <li>• Dual joystick control</li> <li>• "Smart" expandable system</li> <li>• 38 hp Kohler Engine</li> <li>• Working Load Compensation</li> <li>• 12 gal. fuel tank</li> <li>• In-joystick steering control</li> <li>• Min/Max steering leg notification</li> </ul>	<ul style="list-style-type: none"> <li>• Simple, easy, joystick controls which eliminate overwhelming system of hydraulic levers</li> <li>• Reduction in number of valves and hydraulic components which reduces heat</li> <li>• Easily upgradeable for remote control</li> </ul> <hr/> <ul style="list-style-type: none"> <li>• Drive and steer machine with one hand</li> <li>• Steering leg up/down indicator for safety</li> </ul>	<ul style="list-style-type: none"> <li>• Confusing system of levers and labels</li> <li>• Not available</li> </ul> <hr/> <ul style="list-style-type: none"> <li>• Not available</li> </ul>
<p><b>Frame Assembly</b></p> <ul style="list-style-type: none"> <li>• Modular frame</li> <li>• Fork pockets for lifting</li> <li>• Removable operator platforms</li> </ul>	<ul style="list-style-type: none"> <li>• Quickly extend / shorten machine for varying tube lengths</li> <li>• Standard fork pockets for quick/easy jobsite transport</li> <li>• Easily remove operator platforms for clearance</li> </ul>	<ul style="list-style-type: none"> <li>• Not available in modular lengths</li> <li>• Not available</li> <li>• Requires Tools</li> </ul>
<p><b>Tube Couplers</b></p> <ul style="list-style-type: none"> <li>• Quick 3-bolt change</li> <li>• Solid 2" shaft assembly</li> <li>• 1" Front "Slinger" tube</li> </ul>	<ul style="list-style-type: none"> <li>• Remove just six bolts and roll tubes in and out of machine</li> <li>• 2" Solid drive shaft for longer life</li> <li>• 1" of infinite adjustment on front "Slinger" tube</li> </ul>	<ul style="list-style-type: none"> <li>• Need to slide entire tube to change</li> <li>• Smaller drive shaft</li> </ul>

